



Continuous Inkjet Printer

CI1890

Continuous Inkjet Printer



Touch-screen

Sensitive Response;
Easy Menu;
Friendly Editor;
Multi-level user

Printing

4 lines supported;
480m/min Max speed;
More print modes;
Customized function

Consumable


Plug and play design;
Remaining level showing and alarming;
Chip protection system;
10ml solvent per hour using

Maintenance

Self cleaning;
Self detection;
One month standby;
Integration spare parts



Plastic Bag

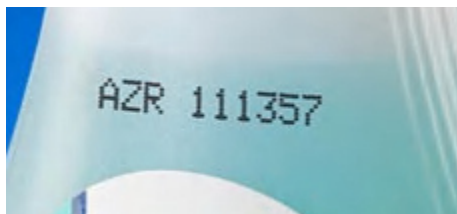

HDPE Bottle




Various Label



Metal Cap



PVC Cable

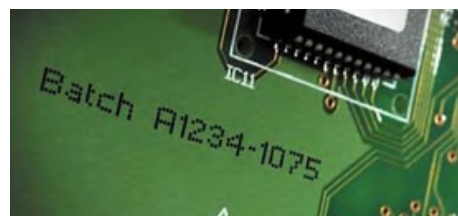


Electronic Component


Parameters

Speed	Fast mode 290m/min (7 dots) ; High-speed mode 480m/min (5 dots)
Font Matrix	5x4, 7x4, 7x5, 9x6, 11x7, 11x8, 16x11, 24x20
Barcode	Code 39, EAN8, EAN13, Code 128, QR Code, Data Matrix
Data Interface	USB2.0
Photocell Sensor	Photocell sensor, Alarm light, Encoder
Print Distance	5mm~15mm, Recommend 12mm
Controller	10.1 inch capacitive touch screen
Language	Arabic, Chinese, English, French, German, Greek, Italian, Korean, Persian, Portuguese, Russian, Spanish, Thai, Turkish etc (Support customization)
Storage	8G ($\geq$ 1,000 print files)
Protection Level	IP55
Print Head	Path length: 2,700mm; Head length: 256mm; Nozzle diameter: 60/50 μ m
Consumable Capacity	Ink: 750ml/bottle; Make up: 750ml/bottle
Working Condition	0°C~45°C(32°F~113°F), 0~90%RH (Non-condensing)
Voltage & Power	110~240V, AC, 50/60HZ, 120W
Machine Weight	21kg
Extended Parts	Extra photoelectric interface, Encoder device, Placing desk

Dimension & Accessories

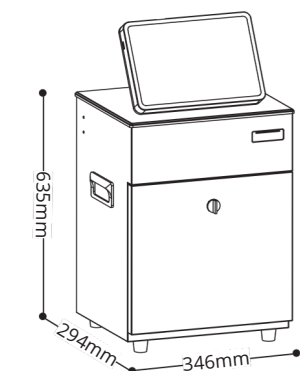

Standard List			
 ① Stand bracket	 ② Touch screen	 ④ Ink x 2	 ⑤ Make up
	 ③ Main machine	 ⑥ Alarm light	 ⑦ Tool kit

Optional Parts		
 ① Extra Photoelectric Sensor	 ② Encoder	 ③ Placing desk